




FOR REFERENCE ONLY

Deep groove ball bearings - Single-row - Shielded/sealed type - Contact sealed

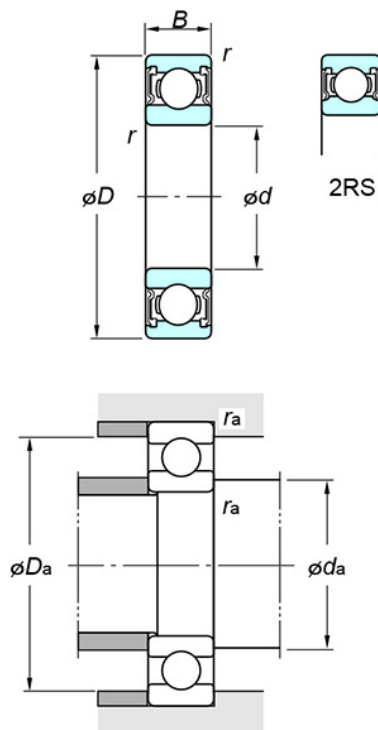

Bearing No. 6304 2RS

Specifications

(Boundary dimensions ...etc)

d(mm)	20
D(mm)	52
B(mm)	15
r(min.)(mm)	1.1
Basic load ratings : Cr(kN)	19.9
Basic load ratings : C0r(kN)	7.85
Fatigue load limit : Cu(kN)	0.660
factor : f0()	12.3
Limiting speeds(Grease lub.)(min-1)	9500
Limiting speeds(Oil lub.)(min-1)	

Mounting dimensions

da(min.)(mm)	26.5
da(max.)(mm)	27
Da(max.)(mm)	45.5
ra(max.)(mm)	1

Refer.

(Refer.)Mass(kg)	0.144
------------------	-------