



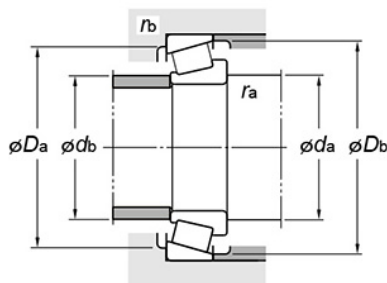

FOR REFERENCE ONLY

Tapered roller bearings - Single-row - Inch series

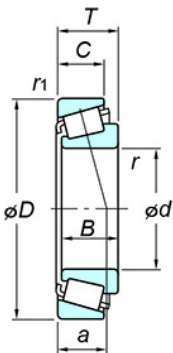

Bearing No. JL69349/10

Specifications

(Boundary dimensions ...etc)

d(mm)	38.000
D(mm)	63.000
T(mm)	17.000
B(mm)	17.000
C(mm)	13.500
r(min.)(mm)	SP
r1(min.)(mm)	SP
Basic load ratings : Cr(kN)	54.7
Basic load ratings : C0r(kN)	58.2
Fatigue load limit : Cu(kN)	8.25
Limiting speeds(Grease lub.)(min-1)	6000
Limiting speeds(Oil lub.)(min-1)	8000
Load center spread : a(mm)	14.6
Constant :e()	0.42
Axial load factors : Y1()	1.44
Axial load factors : Y0()	0.79

Mounting dimensions

da(mm)	49.0
db(mm)	41.0
Da(mm)	60.0
Db(mm)	56.5
ra(max.)(mm)	3.5
rb(max.)(mm)	1.2

Refer.

(Refer.)Mass(kg)	0.199
------------------	-------

JTEKT | JTEKT CORPORATION

2021/04/13